

Please type a plus sign (+) inside this box →

+

09-05-00

A

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new non-provisional applications under 37 CFR 1.53(b))

Attorney Docket No.
98-0616.15

Total Pages

First Named Inventor or Application Identifier

Vishnu K. Agarwal

Express Mail Label No.

EL679497501US

PTO
09/652580
06/31/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents

Box Patent Application

Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages 26
(preferred arrangement set forth below)
-Descriptive
-Cross References to Related Application
-Statement Regarding Fed sponsored R & D
-Reference to Microfiche Appendix
-Background of the Invention
-Brief Summary of the Invention
-Brief Description of the Drawings (if filed)
-Detailed Description
-Claim(s)
-Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) Total Sheets 12
Total Pages 4
4. Oath or Declaration
a. ☐ Newly executed (original or copy)
b. ☒ Copy from a prior application (37CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b,
is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☒ 37 CFR 3.73(b) Statement ☒ Power of Attorney
(where there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☒ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other

17. ☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____ / _____

18. CORRESPONDENCE ADDRESS

- ☐ Customer Number or Bar Code Label ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

NAME	Charles B. Brantley II				
ADDRESS	Micron Technology, Inc.				
	8000 S Federal Way, Mail Stop 525				
CITY	Boise	STATE	ID	ZIP CODE	83716
COUNTRY	USA	TELEPHONE	(208) 368-4557	Fax	(208) 368-5606

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Vishnu K. Agarwal

Serial No.:

Filed: August 31, 2000

For: DEVICE AND METHOD FOR PROTECTING
AGAINST OXIDATION OF A CONDUCTIVE LAYER IN
SAID DEVICE

§
§ Group Art Unit:
§
§ Examiner:
§
§ Atty. Docket: 98-0616.15
§
§
§

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

"EXPRESS MAIL" MAILING LABEL
NUMBER E 1679497501US
DATE OF DEPOSIT 9-21-00
I HEREBY CERTIFY THAT THIS PAPER IS BEING DEPOSITED WITH THE
UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO
ADDRESSEE" SERVICE UNDER 37 C.F.R. § 1.10 ON THE DATE INDICATED
ABOVE AND IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR
PATENTS, WASHINGTON, D.C. 20231
Irish Homer Skider
Signature

After awarding the above-captioned application the benefit of the priority date of its parent -
- application #09/200,253, filed November 25, 1998 -- please amend the current application as
follows.

IN THE SPECIFICATION:

Immediately after the title, please add the following: --

Related Application

This application is a divisional of U.S. application Ser. No. 09/200,253, filed Nov. 25,
1998. --

IN THE CLAIMS:

Please cancel claims 1-53 and 57-75 without prejudice.

REMARKS

Claims 54-56 are the only claims pending as of this Preliminary Amendment. In a restriction required during prosecution of the parent application (see the Office Action of March 22, 2000), the Examiner identified these claims as "Group II" claims "drawn to a method of making semiconductor device, classified in class 438, subclass 238." The Examiner further identified these as "Group N" species of claims directed to a "method of forming a semiconductor device." If there are any matters which may be resolved or clarified through a telephone interview, the Examiner is requested to contact Applicant's undersigned attorney at the number indicated.

Respectfully submitted,

Date: 8/31/00

Charles Brantley
Charles B. Brantley II
Reg. No. 38,086
Micron Technology, Inc.
8000 S. Federal Way
Boise, ID 83716-9632
(208) 368-4557
ATTORNEY FOR APPLICANT

DOCKET NO 98-0616

APPLICATION FOR LETTERS PATENT


FOR

DEVICE AND METHOD FOR PROTECTING AGAINST OXIDATION OF A CONDUCTIVE
LAYER IN SAID DEVICE

INVENTOR

Vishnu K. Agarwal

Charles B. Brantley II, Reg. No. 38,086
Micron Technology, Inc.
8000 S. Federal Way
Boise, ID 83716-9632
(208) 368-4557

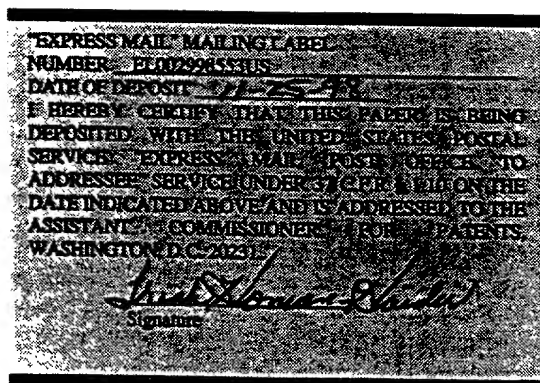

Abstract of the Disclosure

In a semiconductor device including a first conductive layer, the first conductive layer is treated with a nitrogen/hydrogen plasma before an additional layer is deposited thereover. The treatment stuffs the surface with nitrogen, thereby preventing oxygen from being adsorbed onto the surface of the first conductive layer. In one embodiment, a second conductive layer is deposited onto the first conductive layer, and the plasma treatment lessens if not eliminates an oxide formed between the two layers as a result of subsequent thermal treatments. In another embodiment, a dielectric layer is deposited onto the first conductive layer, and the plasma treatment lessens if not eliminates the ability of the first conductive layer to incorporate oxygen from the dielectric.

DEVICE AND METHOD FOR PROTECTING AGAINST
OXIDATION OF A CONDUCTIVE LAYER IN SAID DEVICE

Technical Field

5 The present invention relates generally to a method of protecting against a conductive layer incorporating oxygen and a device including that layer. More specifically, the present invention relates to an *in situ* treatment of tungsten nitride.

Background of the Invention

10

There is a constant need in the semiconductor industry to increase the number of dies that can be produced per silicon wafer. This need, in turn, encourages the formation of smaller die. Accordingly, it would be beneficial to be able to form smaller structures and devices on each die without losing performance. For example, as capacitors are designed to take an ever decreasing amount of die space, those skilled in the relevant art have sought new materials with which to maintain or even increase capacitance despite the smaller size.

15

20

25

One such material is tantalum pentoxide (Ta_2O_5), which can be used as the dielectric in the capacitor. Oftentimes, an electrically conductive layer, such as one made of hemispherical silicon grain (HSG), underlies the tantalum pentoxide and serves as the capacitor's bottom conductive plate. With other dielectrics, it is preferable to have a layer of polycrystalline silicon (polysilicon) deposited over the dielectric to serve as the capacitor's top conductive plate. If polysilicon is deposited directly onto tantalum pentoxide, however, several problems will occur. First, silicon may diffuse into the tantalum pentoxide, thus degrading it. Second, oxygen will migrate from the tantalum pentoxide, resulting in a capacitor that leaks charge too easily. Further, the oxygen migrates to the polysilicon, creating a layer of non-conductive oxide, which decreases the capacitance. This can also be a problem when using barium strontium titanate ((Ba, Sr)TiO₃, or BST) as the dielectric.

In order to avoid these problems, it is known to deposit a top plate comprising two conductive layers. Polysilicon serves as the upper layer of the plate, with a non-polysilicon conductive material interfacing between the tantalum pentoxide and polysilicon. One such material often used is tungsten nitride (WN_x , wherein X is a number greater than zero). However, other problems arise with this process. Specifically, by the end of the capacitor formation process, a layer of non-conductive oxide often forms between the two conductive layers of the top plate. For ease of explanation, this non-conductive oxide will be assumed to be silicon dioxide (SiO_2), although other non-conductive oxides, either alone or in combination, may be present.

Without limiting the current invention, it is theorized that the tungsten nitride is exposed to an ambient containing oxygen. The tungsten nitride adsorbs this oxygen due to bonds located on the grain boundaries of the tungsten nitride surface. Once the polysilicon layer is deposited, the device is then exposed to a thermal process. For example, the capacitor may be blanketed with an insulator, such as borophosphosilicate glass (BPSG). The BPSG layer may not be planar, especially if it is used to fill a trench in which the capacitor is constructed. Heat is applied to the die to cause the BPSG to reflow and thereby planarize. The heat can cause the oxygen at the tungsten nitride surface to diffuse into the polysilicon, wherein the oxygen and silicon react to form silicon dioxide.

Regardless of the exact manner in which the silicon dioxide layer is formed, the result is that the HSG/ Ta_2O_5 / WN_x / SiO_2 /polysilicon layers form a pair of capacitors coupled in series, wherein the HSG/ Ta_2O_5 / WN_x layers serve as one capacitor and the WN_x / SiO_2 /polysilicon layers serve as the second capacitor in the series. This pair of capacitors has less capacitance combined than the single HSG/ Ta_2O_5 / WN_x /polysilicon capacitor that was intended to be formed.

Other problems can occur with the association of WN_x and Ta_2O_5 . For example, it is possible for the WN_x to serve as the bottom plate of a capacitor, underlying the Ta_2O_5 dielectric. In that case, the deposition of the Ta_2O_5 or a subsequent reoxidation of that layer may cause the WN_x layer to incorporate oxygen, thereby reducing capacitance.

It should be further noted that capacitor formation is not the only circumstance in which such problems can occur. There are many situations in which an in-process multi-layer conductive structure is exposed to oxygen and is subjected to conditions that encourage oxidation. Another example can be seen in the formation of metal lines. A layer of tungsten nitride, or perhaps tantalum nitride, may serve as an interface between the conductive material of a via and the metal line. If the interface is exposed to an ambient containing oxygen, then a thermal process involving the alloying or flowing of the metal in the metal line could cause a similar problem with oxidation, thereby hindering electrical contact.

As a result, there is a specific need in the art to prevent or at least decrease the degradation of capacitance in capacitors and of electrical communication in metal lines. There is also a more general need to prevent or at least protect against or minimize the migration of oxygen in relation to a conductive layer of a semiconductor device.

Summary of the Invention

Accordingly, the current invention provides a method for protecting a conductive layer from oxygen. At least one exemplary embodiment concerns preventing or at least limiting a first conductive layer from incorporating oxygen beneath the layer's surface. Other exemplary embodiments address methods of limiting the first conductive layer's ability to adsorb oxygen. In doing so, such embodiments can help prevent the diffusion of oxygen into a second conductive layer, thereby protecting against oxidation between conductive layers. One such method serving as an exemplary embodiment involves exposing one of the conductive layers to an N_2/H_2 plasma before another conductive layer is provided thereon. In a preferred embodiment, this step is performed *in situ* relative to the environment or ambient atmosphere in which the one conductive layer was provided.

Other exemplary embodiments include the use of other nitrogen-containing plasmas, as well as the use of nitrogen-containing gases that are not in plasma form. Still other exemplary embodiments use gases that do not contain nitrogen.

Further, alternate embodiments protect against oxidation between conductive layers with a step performed *ex situ* relative to the environment or ambient atmosphere in which the one conductive layer was provided. In one specific exemplary embodiment of this type, silane gas is flowed over the one conductive layer.

5 In preferred exemplary embodiments, at least one of the processes described above is performed on a conductive material that has the ability to adsorb or otherwise associate with oxygen. In a more specific embodiment, this material is a non-polysilicon material. Still more specific exemplary embodiments perform one of the processes on tungsten nitride or on tantalum nitride. In an even more specific exemplary embodiment,
10 a tungsten nitride layer is treated before providing a polysilicon layer thereover.

In yet another exemplary embodiment, a treatment such as the ones described above occurs in the context of capacitor formation and, more specifically, occurs in between depositing two conductive layers serving as the capacitor's top plate. In another exemplary embodiment, the treatment occurs between depositing the bottom plate and the
15 dielectric of a capacitor. In yet another exemplary embodiment involves treating a conductive layer as part of the formation of a conductive line.

In preferred embodiments, the method completely prevents the formation of the oxidation layer, although other exemplary embodiments allow for the restriction of the oxidation layer. In some embodiments, this oxidation layer is less than 10 angstroms
20 thick. These methods also apply to embodiments concerning limiting a first conductive layer from incorporating oxygen beneath the layer's surface. In addition, the current invention also includes apparatus embodiments exhibiting these characteristics.

Brief Description of the Drawings

25 Figure 1 depicts an in-process device as known in the prior art.

Figure 2 depicts an in-process device having undergone an additional step known in the prior art.

Figure 3 depicts an in-process device having undergone yet more steps known in the prior art.

30 Figure 4 depicts one exemplary embodiment of the current invention.

Figure 5 depicts a second exemplary embodiment of the current invention.

Figure 6 depicts an in-process device as known in the prior art.

Figure 7 depicts another in-process device as known in the prior art.

Figure 8 depicts the in-process device in Figure 7 having undergone an additional
5 step known in the prior art.

Figure 9 depicts a third exemplary embodiment of the current invention.

Figure 10 depicts a fourth exemplary embodiment of the current invention.

Detailed Description of the Preferred Embodiment

10
Figure 1 depicts an “in-process” device 20 – one that is in the process of being constructed – having undergone processes known in the art. First, a substrate 22 has been provided. In the current application, the term “substrate” or “semiconductor substrate” will be understood to mean any construction comprising semiconductor material,
15 including but not limited to bulk semiconductive materials such as a semiconductor wafer (either alone or in assemblies comprising other materials thereon), and semiconductive material layers (either alone or in assemblies comprising other materials). Further, the term “substrate” also refers to any supporting structure including, but not limited to, the semiconductive substrates described above. Over the substrate 22, a first conductive
20 layer 24 is provided. It is assumed for purposes of explanation only that the in-process device is a capacitor in the process of being built. Accordingly, the first conductive layer 24 serves as one of the capacitor’s conductive plates 25 (see Figure 2) and may be made of HSG. Returning to Figure 1, a dielectric 26 is provided which, in this case, is tantalum pentoxide. Subsequently, a second conductive layer is provided, which is intended to
25 serve as part of the other conductive plate for the capacitor. Because the dielectric 26 is tantalum pentoxide, the second conductive layer should not be polysilicon. Rather, in this case, the second conductive layer is assumed to be a tungsten nitride layer 28. Once the tungsten nitride layer 28 is provided, however, there may be a tendency for oxygen to be adsorbed onto the surface of that layer 28.

Further, this adsorption may occur before a third conductive layer is provided. This layer can be a polysilicon layer 30 illustrated in Figure 2. Ideally, the tungsten nitride layer 28 and the polysilicon layer 30 define the other conductive plate 32.

However, if the third conductive layer is oxidizable, then further process steps may cause other results. For example, as seen in Figure 3, a subsequent thermal process may cause a reaction between the polysilicon layer 30 and the oxygen that had been adsorbed onto the surface of the tungsten nitride layer 28. In building a capacitor, this thermal process can be the reflowing of a BPSG layer 34 that is deposited over the polysilicon layer 30. The heat may cause the formation of a silicon dioxide layer 36 between the tungsten nitride layer 28 and the polysilicon layer 30, essentially creating two capacitors 38 and 40 connected in series and having less combined capacitance than the one capacitor originally intended.

One preferred exemplary embodiment of the current invention is a method for protecting against the formation of the silicon dioxide layer 36 during the formation of the capacitor. Once the prior art steps depicted in Figure 1 are carried out, this exemplary embodiment has the tungsten nitride layer 28 exposed *in situ* to an N₂ and H₂ plasma. The term *in situ* indicates that the plasma process takes place in the same chamber, or at least within the same general atmosphere, as the process used to provide the tungsten nitride layer. At the very least, the term *in situ* indicates that the plasma process takes place before exposing the in-process device 20 to the atmosphere associated with providing the polysilicon layer 30. Exemplary process parameters include a temperature ranging from about 150 to about 600 degrees Celsius; gas flows including H₂ at about 50 to about 2000 sccm, N₂ at about 5 to about 1000 sccm, and Ar at about 200 to about 2000 sccm; a radio frequency (RF) power ranging from about 50 to about 1000W; a pressure ranging from about 1 millitorr to about 10 torr; and a process time ranging from about 10 seconds to about 240 seconds. One of ordinary skill in the art, however, can appreciate that these parameters can be altered to achieve the same or a similar process.

Without limiting the current invention, it is theorized that this treatment stuffs the tungsten nitride grain boundaries with nitrogen or otherwise passivates the layer, thereby making the bonds at the grain boundaries less active. As a result, oxygen will be less

likely to be adsorbed or otherwise become associated with the tungsten nitride layer, if at all. For example, without this treatment, a silicon dioxide layer 36 about 10 to 40 angstroms thick will form between the tungsten nitride layer 28 and the polysilicon layer 30 (see Figure 3). The exemplary process described above can result in a silicon dioxide layer 36 that is less than 10 angstroms thick, as seen in Figure 4, and is preferably non-existent, as illustrated in Figure 5.

Moreover, the current invention is not limited to the process described above. There are other methods of providing nitrogen to the tungsten nitride that are within the scope of this invention. For example, another such plasma treatment involves the use of ammonia (NH_3) in place of the nitrogen and hydrogen. In using ammonia for the plasma, parameters such as the ones previously described can be used, except that it is preferred to have a flow rate of ammonia ranging from about 5 sccm to about 1000 sccm and a process time of up to 500 seconds. Yet another embodiment includes a plasma treatment using N_2 without H_2 . In that case, the exemplary process parameters are generally the same as those used with N_2/H_2 plasma except that the flow rate of N_2 is 50-2000 sccm.

Alternatively, ultraviolet light could be provided in place of RF energy. For example, in using N_2 and H_2 or in using NH_3 , the process parameters would be similar to the ones described above for those gases, except the RF energy would be replaced with UV light at a power ranging from 50 W to 3 kW.

Further, the current invention also includes within its scope other methods of providing nitrogen without using electromagnetic energy to affect the gas. One such exemplary embodiment still involves introducing ammonia gas into the process chamber at the same flow rate and time as mentioned in the previous ammonia example, but at a pressure ranging from about 50 millitorr to about 1 atmosphere (760 torr).

In addition, the current invention is not limited to providing nitrogen to the tungsten nitride. Other gases may provide a reducer, passivator material, or some non-oxygen stuffing agent to the tungsten nitride surface; or otherwise cause the tungsten nitride to associate with an oxygen-free material. A plasma treatment using H_2 without N_2 serves as one such embodiment. Exemplary parameters include a temperature ranging from about 150 to about 600 degrees Celsius; gas flows including H_2 at about 50 to about

2000 sccm, and Ar at about 200 to about 2000 sccm; an RF power ranging from about 50 to about 1000W; a pressure ranging from about 1 millitorr to about 10 torr; and a process time ranging from about 10 seconds to about 240 seconds.

Still other gases include diborane (B_2H_6); phosphine (PH_3); and carbon-silicon compounds such as methylsilane (CH_3SiH_3) and hexamethyldisilane ($(CH_3)_3Si-Si(CH_3)_3$); and hexamethyldisilazane (HMDS). Additional alternate embodiments of the current invention use hydrazine (N_2H_4), monomethylhydrazine, carbon tetrafluoride (CF_4), CHF_3 , HCl, and boron trichloride (BCl_3), which are also useful in passivating dielectrics, as addressed in copending application 09/114,847. Also included are mixtures of any of the gases or types of gases described above. Exemplary non-plasma process parameters using these other gases include a flow rate of about 2 sccm to about 400 sccm for these gases; a flow rate of about 50 sccm to about 100 sccm for an inert carrier gas such as He or Ar; a temperature ranging from about 150 to about 600 degrees Celsius, a pressure ranging from about 50 millitorr to about 1 atmosphere (760 torr); and a process time ranging from about 50 to about 500 seconds. Again, one skilled in the art is aware that these parameters can be altered to achieve the same or a similar process.

It is preferred that at least one of the processes described above occur between providing the tungsten nitride layer 28 and providing the polysilicon layer 30. It is more preferable that one of the inventive processes be carried out in a reducing atmosphere or at least before the tungsten nitride layer 28 is exposed to oxygen. Though such exposure is undesirable in many circumstances, it may be unavoidable. For example, the tungsten nitride layer 28 may be exposed to the cleanroom air at some point during processing. Thus, it is even more preferable to treat the tungsten nitride layer 28 *in situ* relative to the environment or ambient atmosphere used to provide the tungsten nitride layer 28. It is still more preferable to cover the treated tungsten nitride layer 28 before the in-process device 20 is exposed, even unintentionally, to oxygen. This is preferable because any exposure may allow at least some oxygen to associate with the tungsten nitride layer 28, even after one of the inventive treatments disclosed herein. Nevertheless, it is not necessary under the current invention to discourage oxygen adsorption before exposing the in-process device to the atmosphere associated with providing the polysilicon layer

30. If the in-process capacitor 20 is removed from the environment used to provide the tungsten nitride layer 28 and one of the inventive processes described has not been performed, then another option within the scope of the current invention is to expose the tungsten nitride layer 28 to a reducing atmosphere before providing the polysilicon layer 30. This can be done by flowing silane gas (SiH_4) into the environment of the in-process device 20. Process parameters include a silane flow ranging from 50 to 1,000 sccm, a pressure of 10 torr to 1 atmosphere, a temperature ranging from 300 to 700 degrees Celsius, and a process time ranging from 10 to 300 seconds. Moreover, this silane treatment, if chosen, is not limited to *ex situ* situations. Silane gas may be used in place of or in combination with the in situ treatments described herein. Accordingly, any combination of the individual processes covered by the current invention are also within its scope.

As mentioned in the background section, oxygen diffusing away from the tungsten nitride is not the only concern when using that layer along with tantalum pentoxide. As seen in Figure 6, a tungsten nitride layer 128 is deposited over the substrate 122. A dielectric layer 126, assumed to be tantalum pentoxide, is deposited over the tungsten nitride layer 128. Assuming the in-process device of Figure 6 represents the early stage of a capacitor, the tungsten nitride layer 128 will serve as the bottom plate rather than part of the top plate as depicted in previous figures. The process of depositing the tantalum pentoxide dielectric layer 126 may cause the tungsten nitride layer 128 to incorporate oxygen. In addition, further processing, such as a reoxidation of the tantalum pentoxide dielectric layer 126 may cause the tungsten nitride layer 128 to incorporate still more oxygen. This incorporation of oxygen will reduce the capacitance of the finished device. Under these circumstances, a preferred embodiment of the current invention calls for exposing the tungsten nitride layer 128 to an N_2/H_2 plasma before depositing tantalum pentoxide dielectric layer 126. This plasma is created under the parameters already disclosed above. Although using an N_2 and H_2 plasma is preferred, the alternatives presented earlier – such as a non-plasma process, the use of another nitrogen-containing gas, or the use of a nitrogen-free gas, may also be used under these circumstances, and such alternatives fall within the scope of the invention. Further, it is

not required to use tungsten nitride and tantalum pentoxide as the two layers, as embodiments of the current invention will work on other conductive layers and dielectric layers as well.

Thus, embodiments of the current invention protect against a conductive layer associating with oxygen in at least two circumstances. First, where a dielectric is deposited over a conductive layer, the disclosed methods help prevent oxygen from being incorporated within the conductive layer. Second, when a second conductive layer is deposited over the initial conductive layer, the disclosed methods inhibit oxygen from being incorporated by the second conductive layer and forming an oxide.

It should be further noted that embodiments of the current invention are not limited to the circumstances related to the formation of capacitors. As further mentioned in the background section, a similar risk of oxidation between two conductive materials can occur during the formation of metal lines in a semiconductor device. As seen in Figure 7, insulation 42 has been deposited over the substrate 22 and subsequently etched to define a via 44. The via is filled with a conductive material, such as polysilicon, tungsten, copper, or aluminum. In this configuration, the conductive material may be referred to as a "plug" 46. The plug 46 will allow electrical communication between the underlying substrate 22, which may be doped to serve as part of a transistor, and the overlying line material 48. The line material 48 may be copper or some other conductive material, including an alloy. The line material 48 is often deposited within a container 50, also defined by etching insulation 42. (One skilled in the art can appreciate that different layers of insulation may define the via 44 and the container 50.)

As a part of this process, it may also be preferred to include an interposing layer 52 between the line material 48 and the plug 46. For purposes of explaining the current invention, it is assumed that the interposing layer 52 comprises tungsten nitride. This interposing layer 52 may enhance electrical contact between the line material 48 and the plug 46, promote adhesion of the line material 48 within the container 50, prevent or slow the diffusion of material across its boundaries, or serve some other purpose.

Regardless of the intended or inherent purpose, this interposing layer may adsorb oxygen after it is formed. Moreover, there may be thermal processes involved with or

occurring subsequent to providing the line material 48. Such a thermal process could be used to deposit, flow, or alloy the line material 48. As a result of this or any other thermal process, it is believed that the oxygen adsorbed by the tungsten nitride interposing layer 52 will react with the line material 48, thereby forming an oxide layer 54 between the interposing layer 52 and the line material 48 (Figure 8). This oxide layer 54, being an insulator, will hinder the ability to allow electrical communication between the line material 48 and the plug 46. Accordingly, the exemplary methods described above may be used to reduce the oxide layer 54 to a thickness of less than 10 angstroms and preferably down to 0 angstroms, as seen respectively in figures 9 and 10.

One skilled in the art can appreciate that, although specific embodiments of this invention have been described for purposes of illustration, various modifications can be made without departing from the spirit and scope of the invention. For example, it is not necessary to use an exemplary treatment of the current invention on a tungsten nitride layer. The invention's embodiments will also be effective on tantalum nitride surfaces, as well as other surfaces that may adsorb or otherwise associate or interact with oxygen.

Further, it should also be noted that the general process described above for providing a metal line could be considered a damascene process, wherein a hole in insulation is filled with metal. This type of process is contrasted to processes wherein a continuous layer of metal is etched to a desired configuration and then surrounded with insulation. More specifically, the metal line process describe above is an example of a dual damascene process. It follows, then, that the current invention may be applied in any type of damascene process. Moreover, one skilled in the art will now be able to appreciate that that exemplary methods embodying the current invention apply to any situation involving the prevention, minimization, or change in a factor affecting the association of oxygen with a conductive layer. As a result, the current invention also includes within its scope devices that comprise two conductive layers and a minimal amount of oxide, if any, therebetween. Accordingly, the invention is not limited except as stated in the claims.

Claims

What is claimed is:

1. A method of treating a semiconductor device, comprising:

5 providing a capacitor having a first plate, a dielectric over said first plate,
 and a first conductive layer over said dielectric; and
 exposing said first conductive layer to an N_2/H_2 plasma.

2. The method in claim 1, wherein said step of providing a capacitor comprises providing
10 an in-process capacitor; and said method further comprises a step of providing a second
 conductive layer over said first conductive layer.

3. The method in claim 2, further comprising a step of defining a top plate with said first
15 conductive layer and said second conductive layer.

4. A method of passivating a conductive material, comprising:

 providing said conductive material, wherein said conductive material has an
 ability
 to associate with oxygen; and
20 exposing said conductive material to a plasma.

5. The method in claim 4, wherein said step of exposing said conductive material to a
 plasma causes a reduction in said ability of said conductive material to associate with
 oxygen.

6. The method in claim 4, wherein said step of exposing said conductive material to a
 plasma comprises exposing said conductive material to a plasma containing a selection of
 nitrogen and hydrogen.

7. The method in claim 6, wherein said step of exposing said conductive material to a plasma containing nitrogen comprises exposing said conductive material to a plasma selected from a group consisting of an N_2/H_2 plasma, an N_2 plasma, an H_2 plasma, an NH_3 plasma, and mixtures thereof.

8. The method in claim 7, wherein said step of exposing said conductive material to a plasma containing nitrogen comprises exposing said conductive material to an N_2/H_2 plasma under parameters including:

- a temperature ranging from about 150 to about 600 degrees Celsius;
- an H_2 gas flow of about 50 to about 2000 sccm;
- an N_2 gas flow of about 5 to about 1000 sccm;
- an Ar gas flow of about 200 to about 2000 sccm;
- an RF power ranging from about 50 to about 1000W;
- a pressure ranging from about 1 millitorr to about 10 torr; and
- a process time ranging from about 10 seconds to about 240 seconds.

9. The method in claim 7, wherein said step of exposing said conductive material to a plasma containing nitrogen comprises exposing said conductive material to an NH_3 plasma under parameters including:

- a temperature ranging from about 150 to about 600 degrees Celsius;
- an NH_3 gas flow of about 5 to about 1000 sccm;
- an Ar gas flow of about 200 to about 2000 sccm;
- an RF power ranging from about 50 to about 1000W;
- a pressure ranging from about 1 millitorr to about 10 torr; and
- a process time no greater than about 500 seconds.

10. A method of affecting a surface of a conductive layer included as part of a capacitor plate, comprising:

- introducing an oxygen-free material to said conductive layer of said capacitor; and
- passivating said surface with said oxygen-free material.

11. The method in claim 10, wherein said step of introducing an oxygen-free material comprises introducing a gas containing said oxygen-free material.

5 12. The method in claim 11, wherein said step of introducing a gas comprises introducing a generally un-ionized gas.

13. The method in claim 12, wherein said step of introducing a generally un-ionized gas comprises providing a nitrogen-free gas.

10

14. The method in claim 12, wherein said step of introducing a generally un-ionized gas comprises providing a gas selected from a group consisting of ammonia, diborane, phosphine, hydrazine, monomethylhydrazine, carbon tetrafluoride, CHF_3 , HCl , boron trichloride, carbon-silicon compounds, and mixtures thereof.

15

15. The method in claim 14, wherein said step of introducing a generally un-ionized gas comprises providing a gas selected from a group consisting of ammonia, diborane, phosphine, hydrazine, monomethylhydrazine, carbon tetrafluoride, CHF_3 , HCl , boron trichloride, methylsilane, hexamethyldisilane, hexamethyldisilazane, and mixtures thereof.

20

16. The method in claim 15, wherein said step of passivating said surface comprises exposing said surface to an ammonia gas under parameters including:

a temperature ranging from about 150 to about 600 degrees Celsius;

25

an ammonia gas flow of about 5 to about 1000 sccm;

an Ar gas flow of about 200 to about 2000 sccm;

a pressure ranging from about 50 millitorr to about 1 atmosphere; and

a process time no greater than about 500 seconds.

30 17. A method of forming a capacitor, comprising:

forming a capacitor plate, comprising:

- providing a first conductive layer in a first environment;
- exposing said first conductive layer to a passivation gas; and
- depositing a second conductive layer over said first conductive layer.

5

18. The method in claim 17, wherein said step of exposing said first conductive layer to a passivation gas further comprises exposing said first conductive layer to a passivation gas *ex situ*.

10

19. The method in claim 17, wherein said step of exposing said first conductive layer to a passivation gas further comprises exposing said first conductive layer to silane in a second environment.

15

20. The method in claim 17, wherein said step of exposing said first conductive layer comprises exposing said first conductive layer to a passivation gas *in situ*.

20

21. The method in claim 17, wherein said step of exposing said first conductive layer comprises exposing said first conductive layer to a passivation gas while still in said first environment.

25

22. The method in claim 17, wherein said step of providing a first conductive layer comprises providing a first conductive layer in an oxygen-free environment; and wherein said step of exposing said first conductive layer comprises exposing said first conductive layer to a passivation gas in said oxygen-free environment.

30

23. The method in claim 22, wherein said step of depositing a second conductive layer comprises depositing said second conductive layer in said oxygen-free environment.

24. The method in claim 22, wherein said step of depositing a second conductive layer comprises depositing said second conductive layer in a second oxygen free-environment.

25. A method of forming a conductive line over a substrate, comprising:
depositing a conductive plug over said substrate;
depositing a nitride over said plug in an ambient atmosphere, wherein said nitride
5 has a surface bond;
treating said surface bond; and
depositing a metal over said nitride.

26. The method in claim 25, wherein said step of treating said surface bond comprises
10 treating said surface bond before said step of depositing a metal.

27. The method in claim 26, wherein said step of treating said surface bond further
comprises treating said surface bond in said ambient atmosphere.

28. The method in claim 27, wherein said step of treating said surface bond further
comprises treating said surface bond in a reducing atmosphere.

29. The method in claim 28, wherein said step of treating said surface bond further
comprises inhibiting an ability of said nitride to adsorb oxygen.

30. A damascene process, comprising:
depositing a first layer of insulation over a substrate;
etching a first hole in said first layer of insulation;
filling said first hole with a metal;
25 depositing a second layer of insulation over said first layer of insulation;
etching a second hole in said second layer of insulation and over said first hole;
providing an interface layer over said metal and within said second hole; and
exposing said interface layer to a nitrogen/hydrogen plasma.

31. A semiconductor process, comprising:

providing a first conductive layer;
providing a second conductive layer on said first conductive layer; and
inhibiting a formation of oxide between said first conductive layer and said
second

5 conductive layer with a passivator material.

32. The process in claim 31, wherein said step of inhibiting a formation of oxide
comprises preventing an oxygen molecule from moving from said first conductive layer
to said second conductive layer.

10

33. The process in claim 32, wherein said step of preventing an oxygen molecule from
moving from said first conductive layer comprises preventing said oxygen molecule from
associating with said first conductive layer.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
219

said step of depositing a first conductive layer comprises depositing a capacitor
plate;

said method further comprises depositing an insulator over said second
conductive

5 layer; and

said step of exposing said second conductive layer to a thermal process comprises
flowing said insulator.

38. The method in claim 36, wherein:

10 said step of depositing a first conductive layer comprises depositing a plug; and
said step of exposing said second conductive layer to a thermal process comprises
flowing said second conductive layer.

39. The method in claim 36, wherein said step of exposing said second conductive layer
15 to a thermal process comprises exposing said second conductive layer to an alloy process.

40. A method of constructing a multi-layered device, comprising:

providing a first conductive layer in a first environment;

protecting said first conductive layer from oxygen association, wherein said

20 protecting step is accomplished with a second environment formed of a
gas selected from a group consisting of:

a plasma,

a non-ionized gas,

a nitrogen-containing gas,

25 a nitrogen-free gas,

an *in situ* gas,

an *ex situ* gas, and

combinations thereof; and

providing a second conductive layer on said first conductive layer.

30

41. A method of processing a semiconductor device, comprising:

depositing a first conductive material;

introducing said first conductive material to a nitrogen-containing plasma;

depositing a second conductive material over said first conductive material; and

5 exposing said first conductive material and said second conductive material to a thermal process.

42. The method in claim 41, wherein said step of exposing said first conductive material and said second conductive material to a thermal process further comprises developing an
10 oxide between said first conductive material and said second conductive material, wherein said oxide is less than 10 angstroms thick.

43. A method of passivating a multilayer conductive structure, comprising:

layering a first conductive material;

15 introducing a selection of N_2/H_2 , N_2 , and NH_3 gas to said first conductive material;

releasing nitrogen from said gas with electromagnetic energy; and

layering a second conductive material over said first conductive material.

44. The method in claim 43, wherein said step of releasing nitrogen from said gas with
20 electromagnetic energy comprises directing ultraviolet light toward said gas.

45. A method of treating a wafer, comprising:

depositing a first conductive layer onto said wafer;

exposing said wafer in situ to a reducing environment; and

25 depositing a second conductive layer.

46. The method in claim 45, wherein said step of exposing said wafer in situ to a reducing environment comprises exposing said wafer to silane gas.

47. The method in claim 46, further comprising a step of exposing said wafer in situ to an N_2/H_2 plasma prior to said step of depositing a second conductive layer.

48. The method in claim 47, wherein said step of exposing said wafer in situ to an N_2/H_2 plasma comprises exposing said wafer in situ to said N_2/H_2 plasma prior to said step of exposing said wafer to silane gas.

49. A method of processing a wafer, comprising:

depositing a first conductive layer having a grain boundary; and

associating a non-oxygen material with said grain boundary by exposing said first conductive layer to a selection consisting of:

an N_2/H_2 plasma,

an N_2 plasma,

an H_2 plasma,

an NH_3 plasma,

an NH_3 non-plasma gas,

a silane gas, and

a combination thereof.

50. The method in claim 49, wherein said step of depositing a first conductive layer further comprises depositing a tungsten nitride layer.

51. The method in claim 50, further comprising a step of depositing a second conductive layer over said first conductive layer.

52. The method in claim 50, further comprising a step of depositing a dielectric over said first conductive layer.

53. The method in claim 52, further comprising:

depositing a second conductive layer over said dielectric; and

exposing said second conductive layer to a selection consisting of:

- an N₂/H₂ plasma,
- an N₂ plasma,
- an H₂ plasma,
- an NH₃ plasma,
- an NH₃ non-plasma gas,
- a silane gas, and
- a combination thereof.

54. A method of forming a semiconductor device, comprising:

- providing a first conductive layer; and
- preventing at least some oxygen from migrating in relation to said first conductive layer.

55. The method in claim 54, wherein said method further comprises providing a dielectric onto said first conductive layer; and wherein said step of preventing at least some oxygen from migrating comprises preventing at least some oxygen from migrating from said dielectric to said first conductive layer.

56. The method in claim 54, wherein said method further comprises providing a second conductive layer onto said first conductive layer; and wherein said step of preventing at least some oxygen from migrating comprises preventing at least some oxygen from migrating from said first conductive layer to said second conductive layer.

57. A semiconductor device, comprising:

- a substrate;
- a first conductive layer over said substrate;
- a dielectric over said substrate;
- a second conductive layer over said first conductive layer; and
- a non-oxygen material between said first conductive layer and said second

conductive layer.

58. The semiconductor device of claim 57, wherein:

said dielectric is over said first conductive layer;

said second conductive layer is over said dielectric; and

said non-oxygen material is between said first conductive layer and said dielectric.

59. The semiconductor device of claim 57, wherein said first conductive layer is over said dielectric.

60. The semiconductor device of claim 59, further comprising a third conductive layer between said substrate and said dielectric.

61. A capacitor, comprising:

a bottom plate comprising tungsten nitride and having a surface;

nitrogen at said surface;

a dielectric comprising tantalum pentoxide over said surface; and

a top plate over said dielectric.

62. A capacitor, comprising:

a first plate;

a dielectric over said first plate; and

a second plate over said dielectric, comprising:

a first non-polysilicon conductive layer over said dielectric, and

a second conductive layer over said first non-polysilicon conductive layer.

63. The capacitor in claim 62, wherein said dielectric contains oxygen; wherein said first non-polysilicon conductive layer contains nitrogen; and wherein said second conductive layer comprises polysilicon.

64. The capacitor in claim 63, wherein:

said dielectric layer consists of a selection from tantalum pentoxide and barium
strontium titanate; and

said first non-polysilicon conductive layer consists of a selection from tungsten

nitride and tantalum nitride.

65. The capacitor in claim 64, wherein said second plate comprises an oxygen-free
second plate.

66. The capacitor in claim 64, wherein said second plate comprises an oxide layer
between said first non-polysilicon conductive layer and said second conductive layer,
wherein said oxide layer is less than 10 angstroms thick.

67. The capacitor in claim 64, wherein said first non-polysilicon conductive layer and
said second conductive layer are less than 10 angstroms apart and are separated by a
silicon dioxide layer.

68. A pair of series-coupled capacitors, comprising:

a first conductive layer;

a dielectric over said first conductive layer;

a second conductive layer over said dielectric;

a third conductive layer less than 10 angstroms over said second conductive layer;

and

an oxide of said third conductive layer between said second conductive layer and

said third conductive layer.

69. The pair of series-coupled capacitors in claim 68, wherein said first conductive layer,
said dielectric, and said second conductive layer define a first capacitor; and wherein said
second conductive layer, said oxide, and said third conductive layer define a second
capacitor.

70. A semiconductor device, comprising:

a conductive line;

a plug under said conductive line; and

an interposing layer between said conductive line and said plug and comprising a
non-oxygen stuffing material.

71. The semiconductor device in claim 70, wherein said interposing layer comprises
grain boundaries and nitrogen between said grain boundaries.

72. The semiconductor device in claim 71, further comprising an oxide between said
interposing layer and said conductive line.

73. An in-process device, comprising:

a substrate; and

a conductive layer over said substrate and having a surface stuffed with a non-
oxygen material.

74. The in-process device of claim 73, wherein said surface is a nitrogen-stuffed surface.

75. The device in claim 74, wherein said surface is contacting an oxygen molecule.

1/4

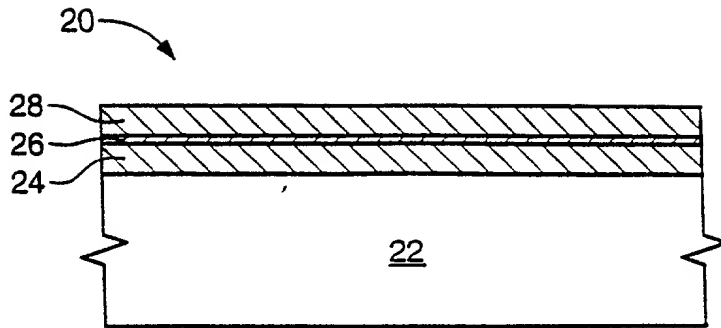


FIG. 1
(PRIOR ART)

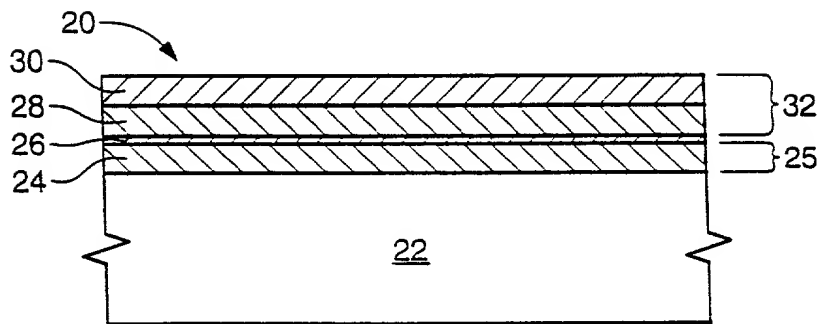


FIG. 2
(PRIOR ART)

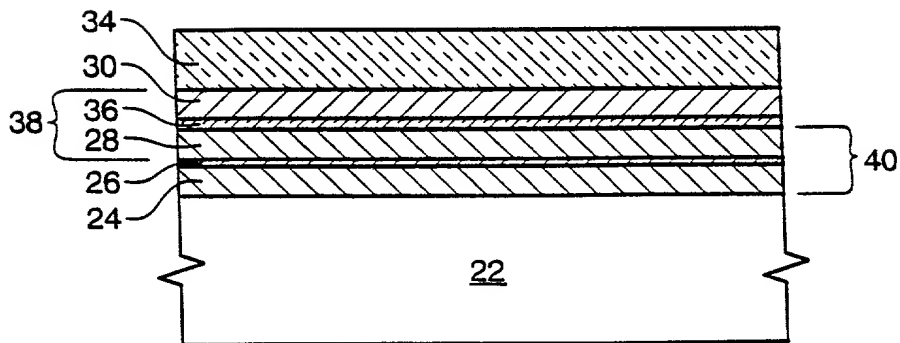


FIG. 3
(PRIOR ART)

2/4

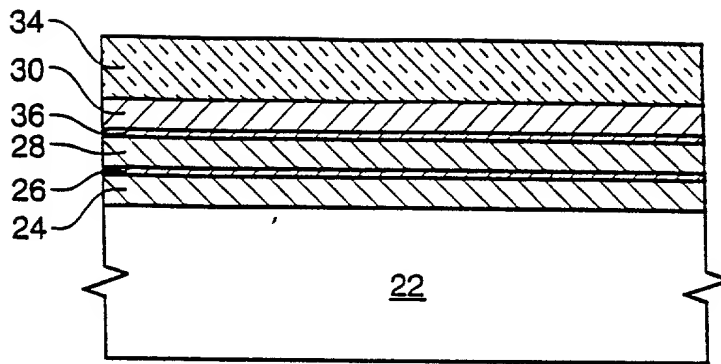


FIG. 4

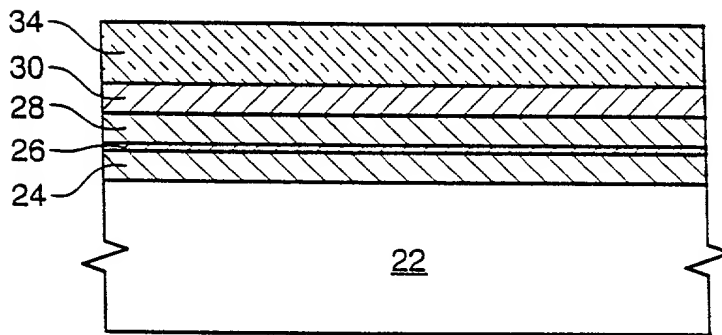


FIG. 5

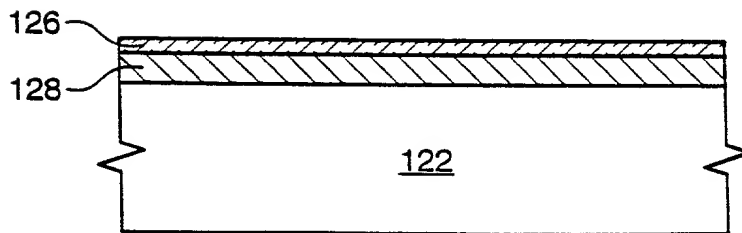


FIG. 6
(PRIOR ART)

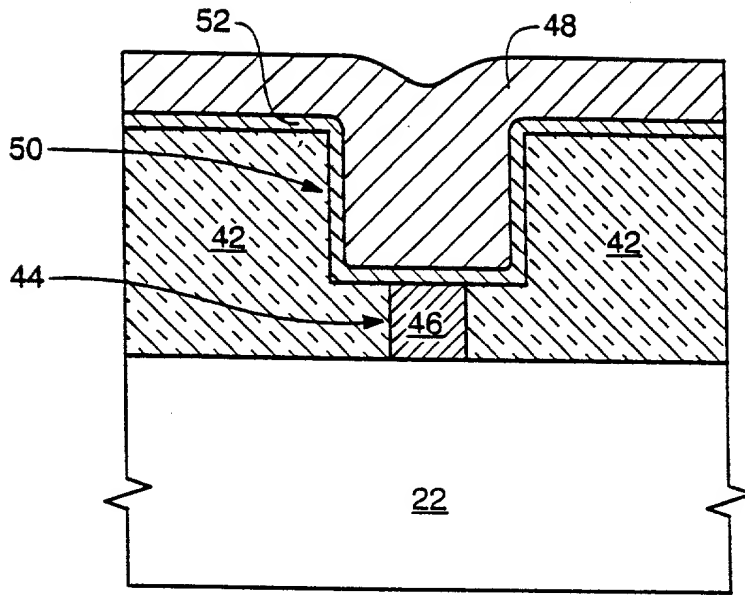


FIG. 7
(PRIOR ART)

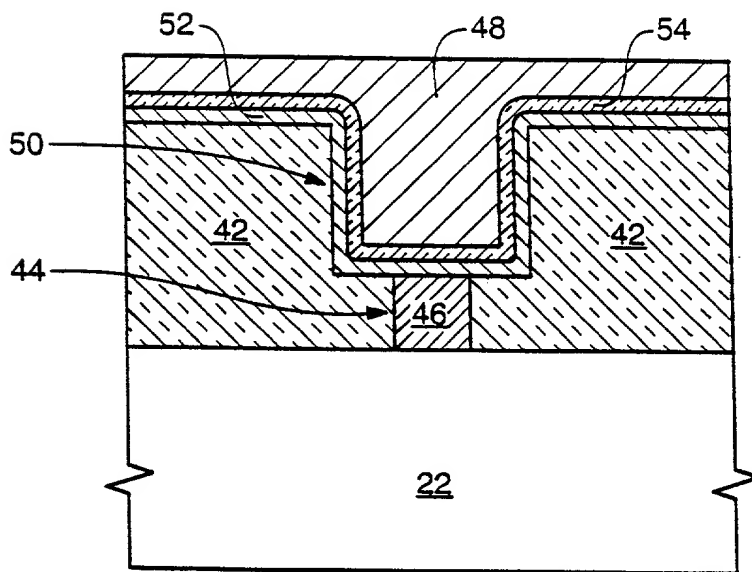


FIG. 8
(PRIOR ART)

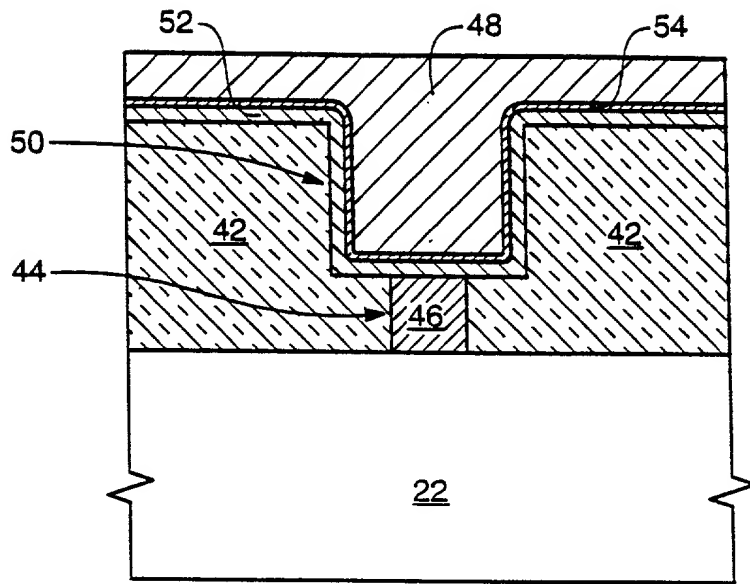


FIG. 9

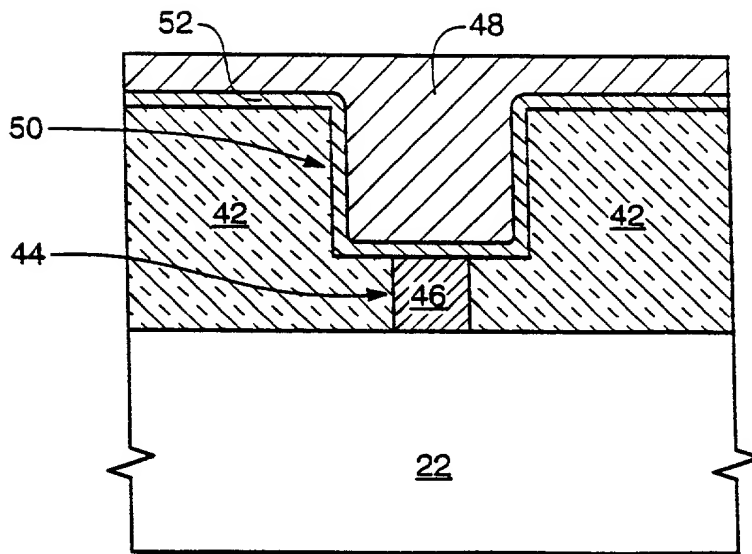


FIG. 10

DECLARATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **DEVICE AND METHOD FOR PROTECTING AGAINST OXIDATION OF A CONDUCTIVE LAYER IN SAID DEVICE**, the specification of which:

X is attached hereto.

_____ was filed on _____, as Application Serial No. _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims.

I acknowledge the duty to disclose information which is material to patentability of the subject matter claimed in this application as "materiality" is defined in Title 37 of the Code of Federal Regulations, § 1.56.

I hereby claim the benefit of any earlier filing date in the United States to which I am entitled under Title 35 of the United States Code, § 120 and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 of the United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 of the Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Serial No.)

(Filing Date)

(Status)

Send correspondence to:

Charles B. Brantley, II, Mail Stop 525
Micron Technology, Inc.
8000 S. Federal Way
Boise, Idaho 83706
(208) 368-4557

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18 of the United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first or sole inventor: [Vishnu K. Agarwal

]

Inventor's Signature: _____

(First, Middle Initial, Last)

Date: 11/24/98

Residence Address: _____

A303, 2382 E. Red Cedar Lane]

City, State, Country: _____

Boise, ID 83716

United States of America

Citizenship: _____

India

Post Office Address: _____

Same as residence address

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Vishnu K. Agarwal

Serial No.:

Filed: August 31, 2000

For: DEVICE AND METHOD FOR
PROTECTING AGAINST OXIDATION OF A
CONDUCTIVE LAYER IN SAID DEVICE

§ Atty. Docket: 98-0616.15

§
§
§
§
§
§
§
§

"EXPRESS MAIL" MAILING LABEL

NUMBER EL679497501US

DATE OF DEPOSIT 8-31-00

I HEREBY CERTIFY THAT THIS PAPER IS BEING DEPOSITED WITH THE
UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO
ADDRESSEE" SERVICE UNDER 37 C.F.R. § 1.10 ON THE DATE
INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT
COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231.

Signature

ELECTION UNDER 37 C.F.R. §§ 3.71 AND 3.73 AND POWER OF ATTORNEY

Assistant Commissioner for Patents

Washington, D.C. 20231

Dear Sir:

The undersigned, being Assignee of the entire interest in the above-identified application by virtue of an Assignment recorded in the United States Patent and Trademark Office as set forth below or filed herewith, hereby elects, under 37 C.F.R. § 3.71, to prosecute the application to the exclusion of the inventor(s).

The Assignee hereby revokes any previous Powers of Attorney and appoints: Charles B. Brantley, II, Reg. No. 38,086; Michael L. Lynch, Reg. No. 30,871; Walter D. Fields, Reg. No. 37,130; Kevin D. Martin, Reg. No. 37,882; and David J. Paul, Reg. No. 34,692 as its attorney or agent, with full power of substitution and revocation, to prosecute the application, to make alterations and amendments therein, to transact all business in the Patent and Trademark Office in connection therewith, to receive any Letters Patent, and for one year after issuance of such Letters Patent to file any request for a certificate of correction that may be deemed appropriate.

Pursuant to 37 C.F.R. § 3.73, the undersigned duly authorized designee of Assignee certifies that the evidentiary documents have been reviewed, specifically the Assignment to MICRON TECHNOLOGY, INC., referenced below, and certifies that to the best of my knowledge and belief, title remains in the name of the Assignee.

Assignment:

 Filed concurrently herewith for
recording, a copy of which is
attached hereto.


X Previously recorded on: 11/25/98,
at Reel: 9611, Frame: 0494.

Please direct all communications as follows:

Charles B. Brantley II
Mail Stop 525
MICRON TECHNOLOGY, INC.
8000 S. Federal Way
Boise, ID 83716-9632
(208) 368-4557

ASSIGNEE: MICRON TECHNOLOGY, INC.

Date: 8-31-00

By: 
Michael L. Lynch
Chief Patent Counsel